Surely, you have already experienced a situation in a public sanitary space, where by no means you did not wish to touch anything. For you, we have developed system SENSO with noncontact flushing, a solution for A movement with your hand or closeness of your body is sufficient to trigger a special sensitive sensor on the cover of flushing cistern and simply think of: "MAY THERE


BE WATER!"

ident 16151 art. 5-380-340

Aplite Senso

Electronic infrared set, suitable for installation with concealed flushing cistern Jog, the latest and most sophisticated generation of concealed flushing cisterns LIV. Enables non-contact trigger of outlet


Convenient for installation in individual and public sanitary spaces, not exposed to ident 15612 ident 15710 ident 15850 ident 00040





Halite

Electronic infrared set, suitable for installation with pre-wall installation element for urinal, the latest generation of pre-wall installation elements LIV. Enables non-contact trigger of outlet valve. Convenient for installation in public sanitary spaces, where the possibility of exposure to vandalism is present.

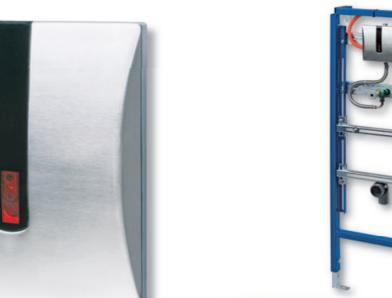

ident 00310 art. 5-384-470

ident 11390 art. 5-360-400

Laguna Senso

WC flushing cistern LAGUNA SENSO enables non-contact trigger of outlet valve with flushing cistern convenient for exposed on-wall installation. A movement with your hand is sufficient to trigger a special sensitive sensor on the cover of flushing cistern and simply think of - you know: "MAY THERE BE WATER!"



ident 00391 art. 5-384-740

Celestine

The only difference from Aplite Senso electronic infrared set is the material of flushing plate. Convenient for installation in public sanitary spaces, where the possibility of exposure to vandalism is present.







Technical information



	Aplite Senso	Celestine	Halite	Laguna Senso
Charging:	24V AC	24V AC	24V AC	24V AC
Power consumption:	State of preparation ca. 1 VA At activation ca. 5 VA	State of preparation ca. 1 VA At activation ca. 5 VA	State of preparation ca. 1 VA At activation ca. 5 VA	State of preparation ca. 1 VA At activation ca. 5 VA
Flow pressure:	0,5 - 10 bar			
Dimensions (mm):	255 x 170 x 18	255 x 170 x 18	180 x 180 x 18	420 x 390 x 135
Material:	ASA	INOX	INOX	ABS with UV stabilisation



"SO BE IT CLEAN"

